# Switchcraft

MT48/MT52 JACK PANEL



Introducing
MT48NS
with Internally
Shunted Twin
Jacks!

/IT48/MT52 JACK PANE

\* Also available as a 48-jack panel

#### FEATURES AND BENEFITS

- Long Frame (1/4") Twin Row Jack Panel similar to Switchcraft<sup>®</sup> 2700 series
- Steel frame jack for superior jack life
- Attractive, corrosion resistant nickel-plated jacks
- Gold switching contacts for long-term reliability in normal-through connections
- Offset ground terminal for ease in making common ground buss connections
- Fanned solder terminals for easier solder connections
- Cable tie bar takes the weight of cables off the jacks
- Accommodates 48 or 52 MT-Jax® in standard 1.75 inch x 19 inch racks
- Jack openings are on 0.625" continuous centers
- Twin plug can be connected to any two adjacent jacks either horizontally or vertically
- Four jack configurations available for the exact switching arrangement: full normal, half normal, non-normal, and internally shunted twin jacks (vertically mounted)
- Two designation strips

## SPECIFICATIONS

### **MATERIALS**

**Jacks** 

Frame: Steel, nickel-plated Bushing: Brass, nickel-plated Springs: Nickel-silver, solder lugs

**Ground Terminal:** Nickel-silver, solder lugs **Switching Contacts:** Welded, gold alloy

**Insulation:** Phenolic spacers, rigid PVC tubing through stack

Screws: Steel, nickel-plated

#### **Panel**

Jack Panel: General purpose black phenolic resin Cable Support Bracket: 5/16" diameter black

epoxy painted steel rod

Screws (designation strip): Steel, black zinc-plated Screws (mounting jack): Steel, nickel-plated Kwik-change® Designation Strip: Extruded

aluminum, black anodized

Marking Strip: White plastic, matte finish Marking Strip Cover: Clear extruded plastic

#### **ELECTRICAL**

 $\Gamma \Lambda V$ 

Contact Resistance: 20 milliohms maximum Contact Rating: 0.75 Amp @ 140V DC

Working Voltage: 140V DC Insulation: 500V AC

Working Temperature Range: -40°C to +85°C

#### ORDERING INFORMATION


Part Number	Description Jacks Installed		
		No.cf Jacks	Type of Jacks
MT48FN	Full Normal	48	YMT334BN
MT52FN		52	
MT48HN	Half Normal	24/24	1strow YMT332BN
MT52HN	Hall Normal	26/26	2nd row
MT48NN	Non-Normal	48	111133151
MT52NN	NOII-NOITHAL	52	YMT332BN
MT48NS	Full Normal	24	
MT52NS	with Internally Shunted Twin Jacks	26	YMT 389N

**Switchcraft®** 

FAX	
To:	
From:	
Date:	

®Registered trademark of Switchcraft, Inc.

## Switchcraft

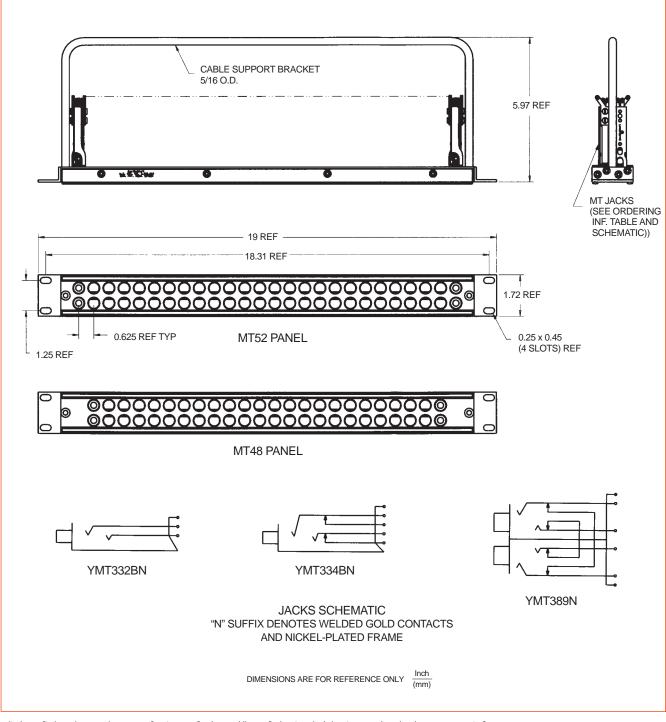

Switchcraft, Inc. is a major manufacturer of a broad line of electronic/electromechanical components for the audio/video, telecommunication, data communication, computer, medical, military, appliance, transportation and instrumentation markets.



SWITCHCRAFT, INC. 5555 NORTH ELSTON AVENUE CHICAGO, IL 60630 FAX: (773) 792-2129 www.switchcraft.com

Switchcraft® — Consistently Excellent Since 1946<sup>SM</sup>

Printed in U.S.A